


XQY-PS16-0.5/8-SE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	500~8000 MHz
插入损耗 Insertion Loss	≤ 4.5dB (Excluding theoretical loss 未含理论损耗 12.0dB)
输入驻波 Input Port VSWR	Typ.1.25 / Max.1.5
输出驻波 Output Port VSWR	Typ.1.13 / Max.1.3
隔离度 Isolation	Typ.26dB / Min.18dB
幅度平衡 Amplitude Balance	±0.4dB
相位平衡 Phase Balance	±8°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female 不锈钢
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 2W
工作温度 Operation Temperature	-45°C ~ +85°C
表面处理 Surface Finishing	Blue paint
外形尺寸 Outline Dimensions	232*150*10 (mm)
重量 Weight	约 980 (g)

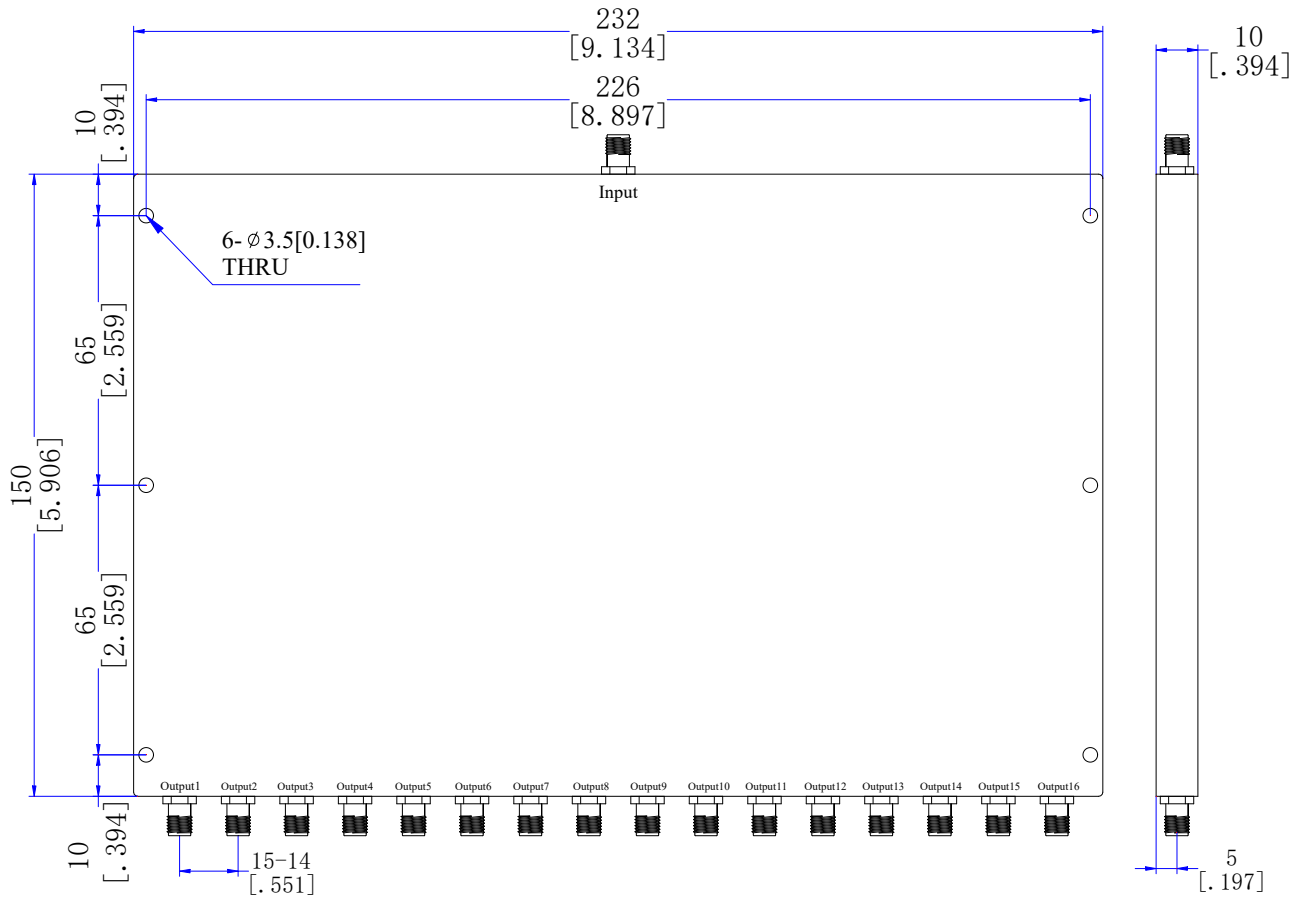

注: 尺寸(mm/[英寸]) , 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (± 0.3)